

INSTRUCTIONS & INFORMATION



CONSOLE FUEL GAUGE KIT

Kit Number 504272

Used on M1 Grasshopper models 2015 and 2016.
Used on 225V & 226V models with SN 6712516 and above.


This kit is designed to relocate the fuel gauge from under the seat in the fuel tank to a more visible location in the console.

INSTALLATION INSTRUCTIONS:

(Refer to illustrations)

- Place unit on a flat level surface.
- Disengage PTO and stop engine.
- Set park brake and remove key from ignition.
- Place steering levers in the "neutral swing-out" position.
- Disconnect the positive battery cable from the battery and secure in such a manner to prevent "accidental sparking" and ignition of any fuel vapor that may be present.
- On 200 and 300B Series units remove the right fender from the tractor to gain access inside the console. On 300 and 400 Series units remove the console panel.
- Locate and disconnect the existing hour meter from the wiring harness inside the console. (photo 1)

- Remove hour meter from console. Also, remove the knockout that the hour meter was installed in, to expose a larger and round hole which the new fuel level/hour meter gauge will be install into. This can be done by striking with a hammer and punch just above the rectangular hole. On 300 & 400 series temporarily reinstall console to facilitate knockout removal. (photo 2)

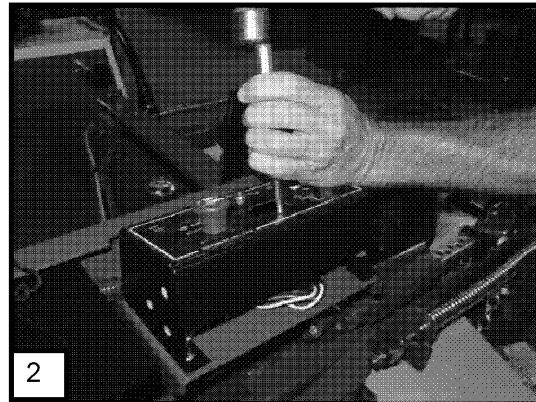

- Trim decal after knockout has been removed. (photo 3)

