

INSTRUCTIONS & INFORMATION



PTO DELAY - 440 & 660 AERA-VATOR


Kit Number 504778

This kit is for use on 700/900 series tractors with Serial Number 6300000 & above that are equipped with auxiliary hydraulic lift and 440 & 660 Aera-Vator. It will create a delay between the release of the hydraulic switch and the re- engagement of the PTO.


INSTALLATION INSTRUCTIONS:

(Refer to photos and wiring diagram)


- Remove the right hand fender. Remove the two screws from the console and lift it up to gain access to the tractor's wiring.

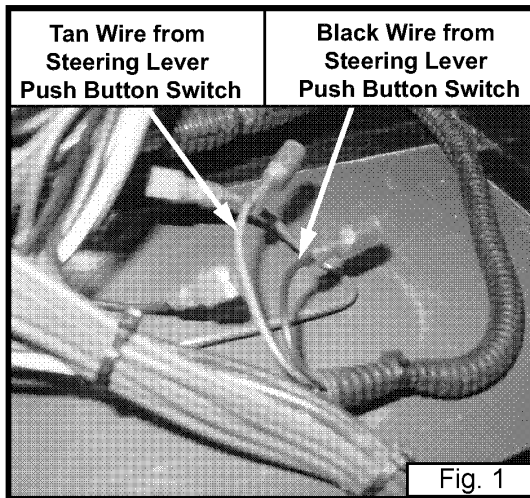

- Locate the tan and black wiring from the steering lever hydraulic push button switch and disconnect both leads from the tractor's harness.

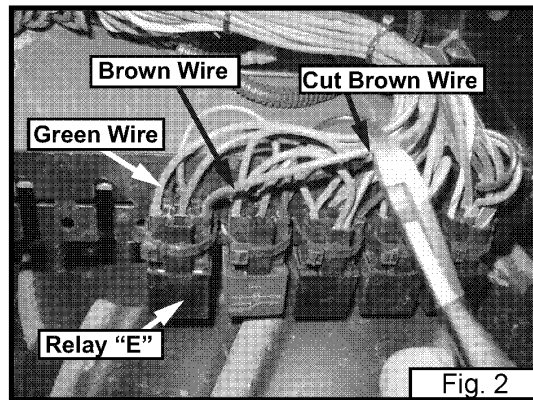

- Locate the Universal Harness relay "E". This can be identified as the relay with 3 brown wires and 1 green wire in the connector. Referring to fig. 2, locate the brown wire that is opposite the green wire in the connector. Cut this wire 4 inches from the connector. Strip .25 inch insulation from the end of each wire.

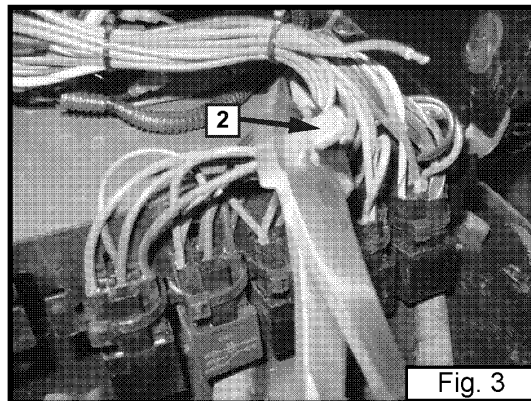

- Crimp a blue female spade terminal (item 2) onto the brown wire leading into the connector.